

Primary Lithium Battery

ER14505



We Power Your Technology

Key Features:

- Nominal Voltage 3.6V
- Energy Density up to 590Wh/kg
- Stable Voltage
- Long Shelf Life
- Wide Operating Temperature
- UL, UN38.3 and RoHS Certified



Main Applications:

- Security System
- Smart Metering
- RFID Devices
- GPS Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

Characteristics (23±2°C, in 1 year)

Open Circuit Voltage	≥3.6V
----------------------	-------

Nominal Capacity	2500mAh
------------------	---------

Battery discharged at continuous current 1.35mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage

Maximum Continuous Current	100mA
----------------------------	-------

Battery discharged for minimum 50% of rated capacity

Maximum Pulse Discharge Current	200mA
---------------------------------	-------

Battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break

Dimensions	Refer to page 2
------------	-----------------

Weight	20.0g
--------	-------

Lithium Content	0.72g
-----------------	-------

Storage Condition	Temperature ≤ 30°C
-------------------	--------------------

Humidity ≤ 75%RH

Operating Temperature	- 40~+85°C
-----------------------	------------

Self-discharge Rate	≤2%
---------------------	-----



HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,

Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040

Tel: +86(0)27 83248452

Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com


Web: www.cnhcb.com

No.: HCB-MKT.PM-S[V1.0 2017 02]

Primary Lithium Battery




ER14505

We Power Your Technology

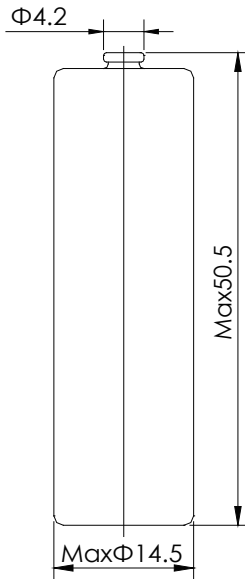

Warning:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C

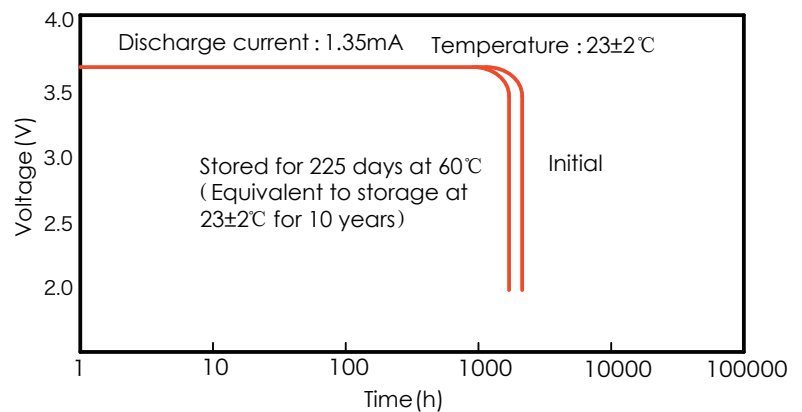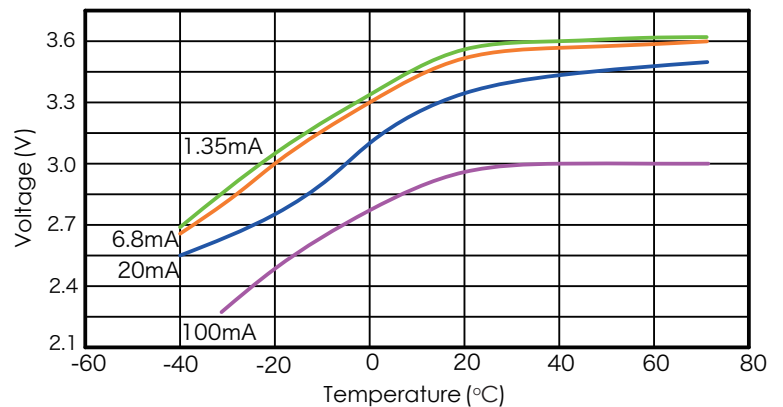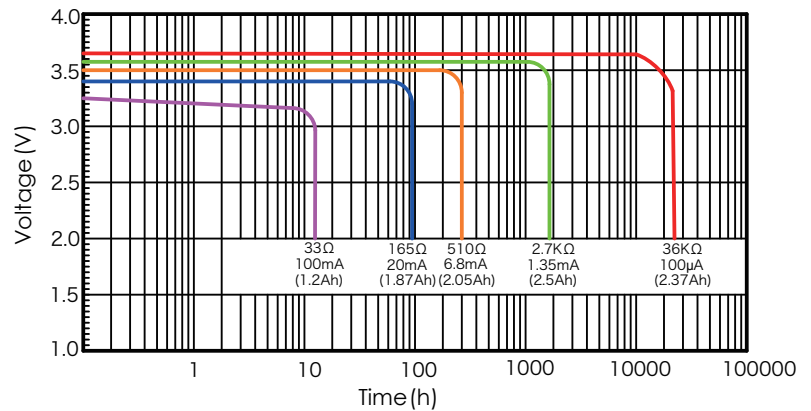

HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040

Tel: +86(0)27 83248452

Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com

Web: www.cnhcb.com

No.: HCB-MKT.PM-S[V1.0 2017 02]